

These transformers are generally in the range of several hundreds of VA to some hundreds of kVA and are frequently used for:

- Changing the low voltage level for:
 - Auxiliary supplies to control and indication circuits
 - Lighting circuits (230 V created when the primary system is 400 V 3-phase 3-wires)

- Changing the method of earthing for certain loads having a relatively high capacitive current to earth (computer equipment) or resistive leakage current (electric ovens, industrial-heating processes, mass-cooking installations, etc.)

LV/LV transformers are generally supplied with protective systems incorporated, and the manufacturers must be consulted for details. Overcurrent protection must, in any case, be provided on the primary side. The exploitation of these transformers requires a knowledge of their particular function, together with a number of points described below.

Note: In the particular cases of LV/LV safety isolating transformers at extra-low voltage, an earthed metal screen between the primary and secondary windings is frequently required, according to circumstances, as recommended in European Standard EN 60742.

3.1 Transformer-energizing inrush current

At the moment of energizing a transformer, high values of transient current (which includes a significant DC component) occur, and must be taken into account when considering protection schemes (see Fig. N31).

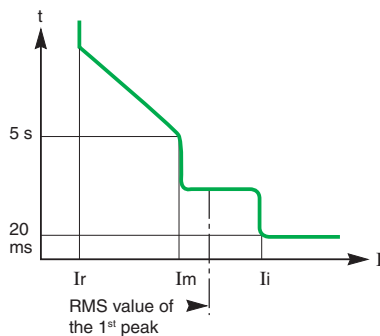


Fig N32 : Tripping characteristic of a Compact NS type STR (electronic)

N24

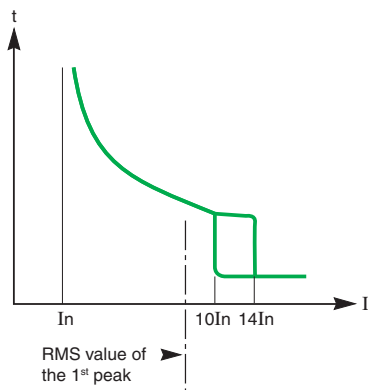


Fig N33 : Tripping characteristic of a Multi 9 curve D

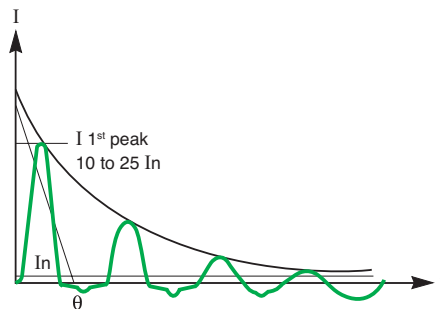


Fig N31 : Transformer-energizing inrush current

The magnitude of the current peak depends on:

- The value of voltage at the instant of energization
- The magnitude and polarity of the residual flux existing in the core of the transformer
- Characteristics of the load connected to the transformer

The first current peak can reach a value equal to 10 to 15 times the full-load r.m.s. current, but for small transformers (< 50 kVA) may reach values of 20 to 25 times the nominal full-load current. This transient current decreases rapidly, with a time constant θ of the order of several ms to several tens of ms.

3.2 Protection for the supply circuit of a LV/LV transformer

The protective device on the supply circuit for a LV/LV transformer must avoid the possibility of incorrect operation due to the magnetizing inrush current surge, noted above. It is necessary to use therefore:

- Selective (i.e. slightly time-delayed) circuit-breakers of the type Compact NS STR (see Fig. N32) or
- Circuit-breakers having a very high magnetic-trip setting, of the types Compact NS or Multi 9 curve D (see Fig. N33)

3 Protection of LV/LV transformers

Example

A 400 V 3-phase circuit is supplying a 125 kVA 400/230 V transformer ($I_n = 180$ A) for which the first inrush current peak can reach $12 I_n$, i.e. $12 \times 180 = 2,160$ A. This current peak corresponds to a rms value of 1,530 A.

A compact NS 250N circuit-breaker with I_r setting of 200 A and I_m setting at $8 \times I_r$ would therefore be a suitable protective device.

A particular case: Overload protection installed at the secondary side of the transformer (see Fig. N34)

An advantage of overload protection located on the secondary side is that the short-circuit protection on the primary side can be set at a high value, or alternatively a circuit-breaker type MA (magnetic only) can be used. The primary side short-circuit protection setting must, however, be sufficiently sensitive to ensure its operation in the event of a short-circuit occurring on the secondary side of the transformer.

Note: The primary protection is sometimes provided by fuses, type aM. This practice has two disadvantages:

- The fuses must be largely oversized (at least 4 times the nominal full-load rated current of the transformer)
- In order to provide isolating facilities on the primary side, either a load-break switch or a contactor must be associated with the fuses.




Fig N34 : Example

3.3 Typical electrical characteristics of LV/LV 50 Hz transformers

3-phase																							
kVA rating	5	6.3	8	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160	200	250	315	400	500	630	800
No-load losses (W)	100	110	130	150	160	170	270	310	350	350	410	460	520	570	680	680	790	950	1160	1240	1485	1855	2160
Full-load losses (W)	250	320	390	500	600	840	800	1180	1240	1530	1650	2150	2540	3700	3700	5900	5900	6500	7400	9300	9400	11400	13400
Short-circuit voltage (%)	4.5	4.5	4.5	5.5	5.5	5.5	5.5	5.5	5	5	4.5	5	5	5.5	4.5	5.5	5	5	4.5	6	6	5.5	5.5

1-phase														
kVA rating	8	10	12.5	16	20	25	31.5	40	50	63	80	100	125	160
No-load losses (W)	105	115	120	140	150	175	200	215	265	305	450	450	525	635
Full-load losses (W)	400	530	635	730	865	1065	1200	1400	1900	2000	2450	3950	3950	4335
Short-circuit voltage (%)	5	5	5	4.5	4.5	4.5	4	4	5	5	4.5	5.5	5	5

3.4 Protection of LV/LV transformers, using Schneider Electric circuit-breakers

Multi 9 circuit-breaker

Transformer power rating (kVA)	230/240 V 1-ph		400/415 V 3-ph	Circuit breaker curve D or K	Size (A)
	230/240 V 3-ph	400/415 V 1-ph			
0.05	0.09	0.16	C60, NG125	0.5	
0.11	0.18	0.32	C60, NG125	1	
0.21	0.36	0.63	C60, NG125	2	
0.33	0.58	1.0	C60, NG125	3	
0.67	1.2	2.0	C60, NG125	6	
1.1	1.8	3.2	C60, C120, NG125	10	
1.7	2.9	5.0	C60, C120, NG125	16	
2.1	3.6	6.3	C60, C120, NG125	20	
2.7	4.6	8.0	C60, C120, NG125	25	
3.3	5.8	10	C60, C120, NG125	32	
4.2	7.2	13	C60, C120, NG125	40	
5.3	9.2	16	C60, C120, NC100, NG125	50	
6.7	12	20	C60, C120, NC100, NG125	63	
8.3	14	25	C120, NC100, NG125	80	
11	18	32	C120, NC100, NG125	100	
13	23	40	C120, NG125	125	

N25

Compact NS100...NS250 circuit-breakers with TM-D trip unit

Transformer power rating (kVA)			Circuit-breaker	Trip unit
230/240 V 1-ph	230/240 V 3-ph 400/415 V 1-ph	400/415 V 3-ph		
3	5...6	9...12	NS100N/H/L	TN16D
5	8...9	14...16	NS100N/H/L	TM05D
7...9	13...16	22...28	NS100N/H/L	TN40D
12...15	20...25	35...44	NS100N/H/L	TN63D
16...19	26...32	45...56	NS100N/H/L	TN80D
18...23	32...40	55...69	NS160N/H/L	TN100D
23...29	40...50	69...87	NS160N/H/L	TN125D
29...37	51...64	89...111	NS250N/H/L	TN160D
37...46	64...80	111...139	NS250N/H/L	TN200D

Compact NS100...NS1600 and Masterpact circuit-breakers with STR or Micrologic trip unit

Transformer power rating (kVA)			Circuit-breaker	Trip unit	Setting I _r max
230/240 V 1-ph	230/240 V 3-ph 400/415 V 1-ph	400/415 V 3-ph			
4...7	6...13	11...22	NS100N/H/L	STR22SE 40	0.8
9...19	16...30	27...56	NS100N/H/L	STR22SE 100	0.8
15...30	5...50	44...90	NS160N/H/L	STR22SE 160	0.8
23...46	40...80	70...139	NS250N/H/L	STR22SE 250	0.8
37...65	64...112	111...195	NS400N/H	STR23SE / 53UE 400	0.7
37...55	64...95	111...166	NS400L	STR23SE / 53UE 400	0.6
58...83	100...144	175...250	NS630N/H/L	STR23SE / 53UE 630	0.6
58...150	100...250	175...436	NS800N/H - NT08H1	Micrologic 5.0/6.0/7.0	1
74...184	107...319	222...554	NS800N/H - NT08H1 - NW08N1/H1	Micrologic 5.0/6.0/7.0	1
90...230	159...398	277...693	NS1000N/H - NT10H1 - NW10N1/H1	Micrologic 5.0/6.0/7.0	1
115...288	200...498	346...866	NS1250N/H - NT12H1 - NW12N1/H1	Micrologic 5.0/6.0/7.0	1
147...368	256...640	443...1,108	NS1600N/H - NT16H1 - NW16N1/H1	Micrologic 5.0/6.0/7.0	1
184...460	320...800	554...1,385	NW20N1/H1	Micrologic 5.0/6.0/7.0	1
230...575	400...1,000	690...1,730	NW25N2/H3	Micrologic 5.0/6.0/7.0	1
294...736	510...1,280	886...2,217	NW32N2/H3	Micrologic 5.0/6.0/7.0	1

A source of comfort and productivity, lighting represents 15% of the quantity of electricity consumed in industry and 40% in buildings. The quality of lighting (light stability and continuity of service) depends on the quality of the electrical energy thus consumed. The supply of electrical power to lighting networks has therefore assumed great importance.

To help with their design and simplify the selection of appropriate protection devices, an analysis of the different lamp technologies is presented. The distinctive features of lighting circuits and their impact on control and protection devices are discussed. Recommendations relative to the difficulties of lighting circuit implementation are given.

4.1 The different lamp technologies

Artificial luminous radiation can be produced from electrical energy according to two principles: incandescence and electroluminescence.

Incandescence is the production of light via temperature elevation. The most common example is a filament heated to white state by the circulation of an electrical current. The energy supplied is transformed into heat by the Joule effect and into luminous flux.

Luminescence is the phenomenon of emission by a material of visible or almost visible luminous radiation. A gas (or vapors) subjected to an electrical discharge emits luminous radiation (Electroluminescence of gases).

Since this gas does not conduct at normal temperature and pressure, the discharge is produced by generating charged particles which permit ionization of the gas. The nature, pressure and temperature of the gas determine the light spectrum.

Photoluminescence is the luminescence of a material exposed to visible or almost visible radiation (ultraviolet, infrared).

When the substance absorbs ultraviolet radiation and emits visible radiation which stops a short time after energization, this is fluorescence.

Incandescent lamps

Incandescent lamps are historically the oldest and the most often found in common use.

They are based on the principle of a filament rendered incandescent in a vacuum or neutral atmosphere which prevents combustion.

A distinction is made between:

■ Standard bulbs

These contain a tungsten filament and are filled with an inert gas (nitrogen and argon or krypton).

■ Halogen bulbs

These also contain a tungsten filament, but are filled with a halogen compound and an inert gas (krypton or xenon). This halogen compound is responsible for the phenomenon of filament regeneration, which increases the service life of the lamps and avoids them blackening. It also enables a higher filament temperature and therefore greater luminosity in smaller-size bulbs.

The main disadvantage of incandescent lamps is their significant heat dissipation, resulting in poor luminous efficiency.

Fluorescent lamps

This family covers fluorescent tubes and compact fluorescent lamps. Their technology is usually known as "low-pressure mercury".

In fluorescent tubes, an electrical discharge causes electrons to collide with ions of mercury vapor, resulting in ultraviolet radiation due to energization of the mercury atoms. The fluorescent material, which covers the inside of the tubes, then transforms this radiation into visible light.

Fluorescent tubes dissipate less heat and have a longer service life than incandescent lamps, but they do need an ignition device called a "starter" and a device to limit the current in the arc after ignition. This device called "ballast" is usually a choke placed in series with the arc.

Compact fluorescent lamps are based on the same principle as a fluorescent tube. The starter and ballast functions are provided by an electronic circuit (integrated in the lamp) which enables the use of smaller tubes folded back on themselves.

Compact fluorescent lamps (see **Fig. N35**) were developed to replace incandescent lamps: They offer significant energy savings (15 W against 75 W for the same level of brightness) and an increased service life.

Lamps known as "induction" type or "without electrodes" operate on the principle of ionization of the gas present in the tube by a very high frequency electromagnetic field (up to 1 GHz). Their service life can be as long as 100,000 hrs.

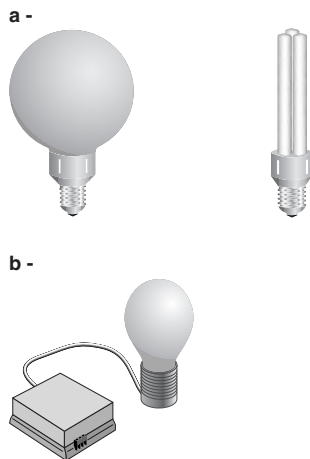


Fig. N35 : Compact fluorescent lamps [a] standard, [b] induction

Discharge lamps (see Fig. N36)

The light is produced by an electrical discharge created between two electrodes within a gas in a quartz bulb. All these lamps therefore require a ballast to limit the current in the arc. A number of technologies have been developed for different applications.

Low-pressure sodium vapor lamps have the best light output, however the color rendering is very poor since they only have a monochromatic orange radiation.

High-pressure sodium vapor lamps produce a white light with an orange tinge.

In high-pressure mercury vapor lamps, the discharge is produced in a quartz or ceramic bulb at high pressure. These lamps are called "fluorescent mercury discharge lamps". They produce a characteristically bluish white light.

Metal halide lamps are the latest technology. They produce a color with a broad color spectrum. The use of a ceramic tube offers better luminous efficiency and better color stability.

Light Emitting Diodes (LED)

The principle of light emitting diodes is the emission of light by a semi-conductor as an electrical current passes through it. LEDs are commonly found in numerous applications, but the recent development of white or blue diodes with a high light output opens new perspectives, especially for signaling (traffic lights, exit signs or emergency lighting).

LEDs are low-voltage and low-current devices, thus suitable for battery-supply.

A converter is required for a line power supply.

The advantage of LEDs is their low energy consumption. As a result, they operate at a very low temperature, giving them a very long service life. Conversely, a simple diode has a weak light intensity. A high-power lighting installation therefore requires connection of a large number of units in series and parallel.




Fig. N36 : Discharge lamps

Technology	Application	Advantages	Disadvantages
Standard incandescent	- Domestic use - Localized decorative lighting	- Direct connection without intermediate switchgear - Reasonable purchase price - Compact size - Instantaneous lighting - Good color rendering	- Low luminous efficiency and high electricity consumption - Significant heat dissipation - Short service life
Halogen incandescent	- Spot lighting - Intense lighting	- Direct connection - Instantaneous efficiency - Excellent color rendering	- Average luminous efficiency
Fluorescent tube	- Shops, offices, workshops - Outdoors	- High luminous efficiency - Average color rendering	- Low light intensity of single unit - Sensitive to extreme temperatures
Compact fluorescent lamp	- Domestic use - Offices - Replacement of incandescent lamps	- Good luminous efficiency - Good color rendering	- High initial investment compared to incandescent lamps
HP mercury vapor	- Workshops, halls, hangars - Factory floors	- Good luminous efficiency - Acceptable color rendering - Compact size - Long service life	- Lighting and relighting time of a few minutes
High-pressure sodium	- Outdoors - Large halls	- Very good luminous efficiency	- Lighting and relighting time of a few minutes
Low-pressure sodium	- Outdoors - Emergency lighting	- Good visibility in foggy weather - Economical to use	- Long lighting time (5 min.) - Mediocre color rendering
Metal halide	- Large areas - Halls with high ceilings	- Good luminous efficiency - Good color rendering - Long service life	- Lighting and relighting time of a few minutes
LED	- Signaling (3-color traffic lights, "exit" signs and emergency lighting)	- Insensitive to the number of switching operations - Low energy consumption - Low temperature	- Limited number of colors - Low brightness of single unit

Technology	Power (watt)	Efficiency (lumen/watt)	Service life (hours)
Standard incandescent	3 – 1,000	10 – 15	1,000 – 2,000
Halogen incandescent	5 – 500	15 – 25	2,000 – 4,000
Fluorescent tube	4 – 56	50 – 100	7,500 – 24,000
Compact fluorescent lamp	5 – 40	50 – 80	10,000 – 20,000
HP mercury vapor	40 – 1,000	25 – 55	16,000 – 24,000
High-pressure sodium	35 – 1,000	40 – 140	16,000 – 24,000
Low-pressure sodium	35 – 180	100 – 185	14,000 – 18,000
Metal halide	30 – 2,000	50 – 115	6,000 – 20,000
LED	0.05 – 0.1	10 – 30	40,000 – 100,000

Fig. N37 : Usage and technical characteristics of lighting devices

4 Lighting circuits

4.2 Electrical characteristics of lamps

Incandescent lamps with direct power supply

Due to the very high temperature of the filament during operation (up to 2,500 °C), its resistance varies greatly depending on whether the lamp is on or off. As the cold resistance is low, a current peak occurs on ignition that can reach 10 to 15 times the nominal current for a few milliseconds or even several milliseconds.

This constraint affects both ordinary lamps and halogen lamps: it imposes a reduction in the maximum number of lamps that can be powered by devices such as remote-control switches, modular contactors and relays for busbar trunking.

Extra Low Voltage (ELV) halogen lamps

Some low-power halogen lamps are supplied with ELV 12 or 24 V, via a transformer or an electronic converter. With a transformer, the magnetization phenomenon combines with the filament resistance variation phenomenon at switch-on. The inrush current can reach 50 to 75 times the nominal current for a few milliseconds. The use of dimmer switches placed upstream significantly reduces this constraint.

Electronic converters, with the same power rating, are more expensive than solutions with a transformer. This commercial handicap is compensated by a greater ease of installation since their low heat dissipation means they can be fixed on a flammable support. Moreover, they usually have built-in thermal protection.

New ELV halogen lamps are now available with a transformer integrated in their base. They can be supplied directly from the LV line supply and can replace normal lamps without any special adaptation.

Dimming for incandescent lamps

This can be obtained by varying the voltage applied to the lampere

This voltage variation is usually performed by a device such as a Triac dimmer switch, by varying its firing angle in the line voltage period. The wave form of the voltage applied to the lamp is illustrated in **Figure N38a**. This technique known as "cut-on control" is suitable for supplying power to resistive or inductive circuits. Another technique suitable for supplying power to capacitive circuits has been developed with MOS or IGBT electronic components. This techniques varies the voltage by blocking the current before the end of the half-period (see **Fig. N38b**) and is known as "cut-off control".

Switching on the lamp gradually can also reduce, or even eliminate, the current peak on ignition.

As the lamp current is distorted by the electronic switching, harmonic currents are produced. The 3rd harmonic order is predominant, and the percentage of 3rd harmonic current related to the maximum fundamental current (at maximum power) is represented on **Figure N39**.

Note that in practice, the power applied to the lamp by a dimmer switch can only vary in the range between 15 and 85% of the maximum power of the lampere

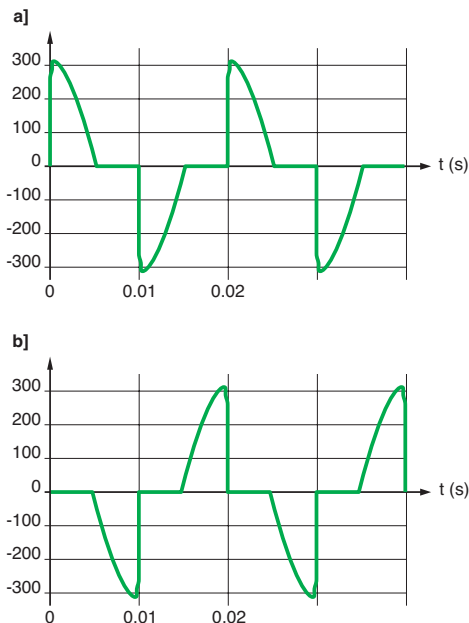


Fig. N38 : Shape of the voltage supplied by a light dimmer at 50% of maximum voltage with the following techniques:
a] "cut-on control"
b] "cut-off control"

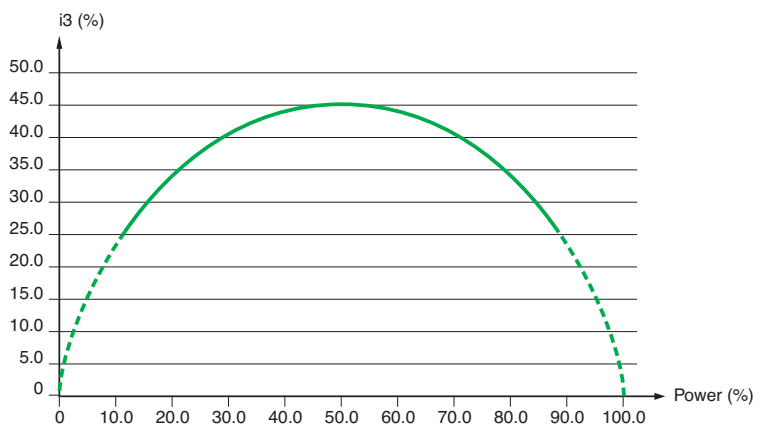


Fig. N39 : Percentage of 3rd harmonic current as a function of the power applied to an incandescent lamp using an electronic dimmer switch

N29

According to IEC standard 61000-3-2 setting harmonic emission limits for electric or electronic systems with current ≤ 16 A, the following arrangements apply:

- Independent dimmers for incandescent lamps with a rated power less than or equal to 1 kW have no limits applied
- Otherwise, or for incandescent lighting equipment with built-in dimmer or dimmer built in an enclosure, the maximum permissible 3rd harmonic current is equal to 2.30 A

Fluorescent lamps with magnetic ballast

Fluorescent tubes and discharge lamps require the intensity of the arc to be limited, and this function is fulfilled by a choke (or magnetic ballast) placed in series with the bulb itself (see Fig. N40).

This arrangement is most commonly used in domestic applications with a limited number of tubes. No particular constraint applies to the switches.


Dimmer switches are not compatible with magnetic ballasts: the cancellation of the voltage for a fraction of the period interrupts the discharge and totally extinguishes the lamp.

The starter has a dual function: preheating the tube electrodes, and then generating an overvoltage to ignite the tube. This overvoltage is generated by the opening of a contact (controlled by a thermal switch) which interrupts the current circulating in the magnetic ballast.

During operation of the starter (approx. 1 s), the current drawn by the luminaire is approximately twice the nominal current.

Since the current drawn by the tube and ballast assembly is essentially inductive, the power factor is very low (on average between 0.4 and 0.5). In installations consisting of a large number of tubes, it is necessary to provide compensation to improve the power factor.

For large lighting installations, centralized compensation with capacitor banks is a possible solution, but more often this compensation is included at the level of each luminaire in a variety of different layouts (see Fig. N41).

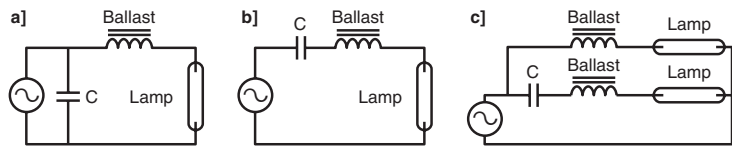

Compensation layout	Application	Comments
Without compensation	Domestic	Single connection
Parallel [a]	Offices, workshops, superstores	Risk of overcurrents for control devices
Series [b]		Choose capacitors with high operating voltage (450 to 480 V)
Duo [c]		Avoids flicker

Fig. N41 : The various compensation layouts: a) parallel; b) series; c) dual series also called "duo" and their fields of application

The compensation capacitors are therefore sized so that the global power factor is greater than 0.85. In the most common case of parallel compensation, its capacity is on average 1 μ F for 10 W of active power, for any type of lamp. However, this compensation is incompatible with dimmer switches.

Constraints affecting compensation

The layout for parallel compensation creates constraints on ignition of the lamp. Since the capacitor is initially discharged, switch-on produces an overcurrent.

An overvoltage also appears, due to the oscillations in the circuit made up of the capacitor and the power supply inductance.

The following example can be used to determine the orders of magnitude.

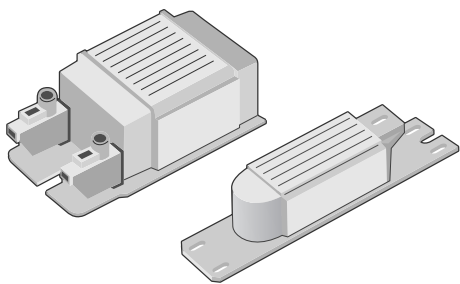


Fig. N40 : Magnetic ballasts

4 Lighting circuits

Assuming an assembly of 50 fluorescent tubes of 36 W each:

- Total active power: 1,800 W
- Apparent power: 2 kVA
- Total rms current: 9 A
- Peak current: 13 A

With:

- A total capacity: $C = 175 \mu\text{F}$
- A line inductance (corresponding to a short-circuit current of 5 kA): $L = 150 \mu\text{H}$

The maximum peak current at switch-on equals:

$$I_c = V_{\max} \sqrt{\frac{C}{L}} = 230\sqrt{2} \sqrt{\frac{175 \times 10^{-6}}{150 \times 10^{-6}}} = 350 \text{ A}$$

The theoretical peak current at switch-on can therefore reach **27 times** the peak current during normal operation.

The shape of the voltage and current at ignition is given in **Figure N42** for switch closing at the line supply voltage peak.

There is therefore a risk of contact welding in electromechanical control devices (remote-control switch, contactor, circuit-breaker) or destruction of solid state switches with semi-conductors.

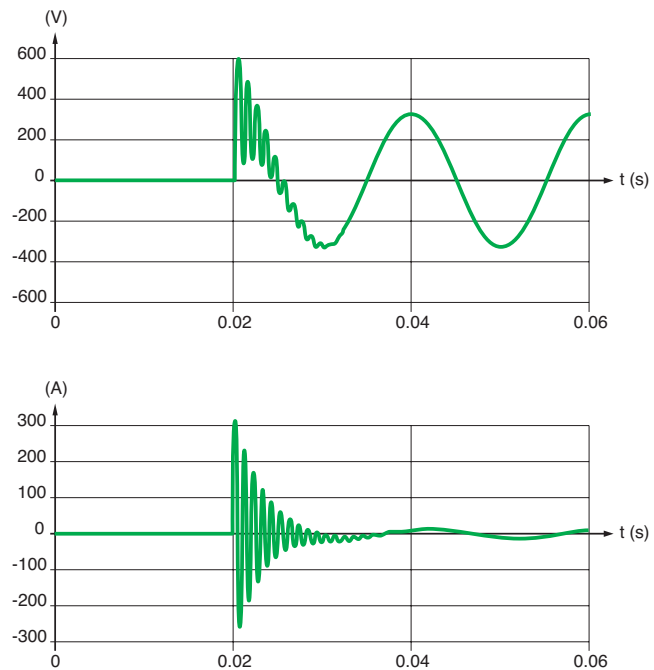


Fig. N42 : Power supply voltage at switch-on and inrush current

In reality, the constraints are usually less severe, due to the impedance of the cables. Ignition of fluorescent tubes in groups implies one specific constraint. When a group of tubes is already switched on, the compensation capacitors in these tubes which are already energized participate in the inrush current at the moment of ignition of a second group of tubes: they “amplify” the current peak in the control switch at the moment of ignition of the second group.

N31

The table in **Figure N43**, resulting from measurements, specifies the magnitude of the first current peak, for different values of prospective short-circuit current I_{sc} . It is seen that the current peak can be multiplied by 2 or 3, depending on the number of tubes already in use at the moment of connection of the last group of tubes.

Number of tubes already in use	Number of tubes connected	Inrush current peak (A)		
		$I_{sc} = 1,500 \text{ A}$	$I_{sc} = 3,000 \text{ A}$	$I_{sc} = 6,000 \text{ A}$
0	14	233	250	320
14	14	558	556	575
28	14	608	607	624
42	14	618	616	632

Fig. N43 : Magnitude of the current peak in the control switch of the moment of ignition of a second group of tubes

Nonetheless, sequential ignition of each group of tubes is recommended so as to reduce the current peak in the main switch.

The most recent magnetic ballasts are known as “low-loss”. The magnetic circuit has been optimized, but the operating principle remains the same. This new generation of ballasts is coming into widespread use, under the influence of new regulations (European Directive, Energy Policy Act - USA).

In these conditions, the use of electronic ballasts is likely to increase, to the detriment of magnetic ballasts.

Fluorescent lamps with electronic ballast

Electronic ballasts are used as a replacement for magnetic ballasts to supply power to fluorescent tubes (including compact fluorescent lamps) and discharge lamps. They also provide the “starter” function and do not need any compensation capacity.

The principle of the electronic ballast (see **Fig. N44**) consists of supplying the lamp arc via an electronic device that generates a rectangular form AC voltage with a frequency between 20 and 60 kHz.

Supplying the arc with a high-frequency voltage can totally eliminate the flicker phenomenon and strobe effects. The electronic ballast is totally silent.

During the preheating period of a discharge lamp, this ballast supplies the lamp with increasing voltage, imposing an almost constant current. In steady state, it regulates the voltage applied to the lamp independently of any fluctuations in the line voltage.

Since the arc is supplied in optimum voltage conditions, this results in energy savings of 5 to 10% and increased lamp service life. Moreover, the efficiency of the electronic ballast can exceed 93%, whereas the average efficiency of a magnetic device is only 85%.

The power factor is high (> 0.9).

The electronic ballast is also used to provide the light dimming function. Varying the frequency in fact varies the current magnitude in the arc and hence the luminous intensity.

Inrush current

The main constraint that electronic ballasts bring to line supplies is the high inrush current on switch-on linked to the initial load of the smoothing capacitors (see **Fig. N45**).

Technology	Max. inrush current	Duration
Rectifier with PFC	30 to 100 I_n	≤ 1 ms
Rectifier with choke	10 to 30 I_n	≤ 5 ms
Magnetic ballast	≤ 13 I_n	5 to 10 ms

Fig. N45 : Orders of magnitude of the inrush current maximum values, depending on the technologies used

N32

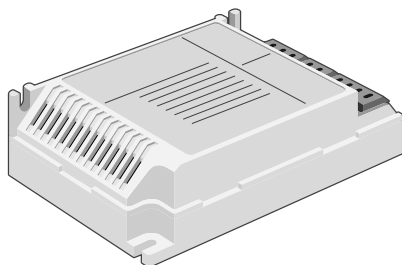


Fig. N44 : Electronic ballast

4 Lighting circuits

In reality, due to the wiring impedances, the inrush currents for an assembly of lamps is much lower than these values, in the order of 5 to 10 In for less than 5 ms. Unlike magnetic ballasts, this inrush current is not accompanied by an overvoltage.

Harmonic currents

For ballasts associated with high-power discharge lamps, the current drawn from the line supply has a low total harmonic distortion (< 20% in general and < 10% for the most sophisticated devices). Conversely, devices associated with low-power lamps, in particular compact fluorescent lamps, draw a very distorted current (see Fig. N46). The total harmonic distortion can be as high as 150%. In these conditions, the rms current drawn from the line supply equals 1.8 times the current corresponding to the lamp active power, which corresponds to a power factor of 0.55.

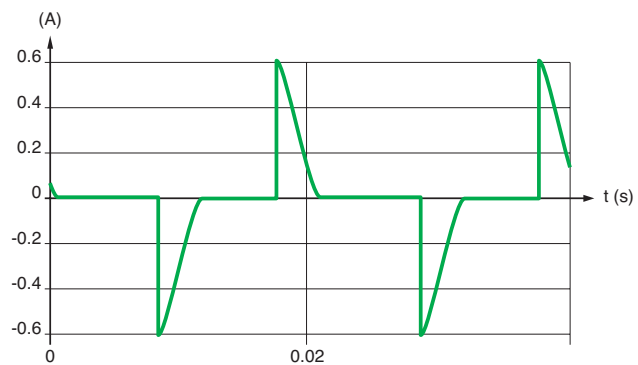


Fig. N46 : Shape of the current drawn by a compact fluorescent lamp

In order to balance the load between the different phases, lighting circuits are usually connected between phases and neutral in a balanced way. In these conditions, the high level of third harmonic and harmonics that are multiple of 3 can cause an overload of the neutral conductor. The least favorable situation leads to a neutral current which may reach $\sqrt{3}$ times the current in each phase.

Harmonic emission limits for electric or electronic systems are set by IEC standard 61000-3-2. For simplification, the limits for lighting equipment are given here only for harmonic orders 3 and 5 which are the most relevant (see Fig. N47).

Harmonic order	Active input power > 25W	Active input power ≤ 25W one of the 2 sets of limits apply:	
	% of fundamental current	% of fundamental current	Harmonic current relative to active power
3	30	86	3.4 mA/W
5	10	61	1.9 mA/W

Fig. N47 : Maximum permissible harmonic current

Leakage currents

Electronic ballasts usually have capacitors placed between the power supply conductors and the earth. These interference-suppressing capacitors are responsible for the circulation of a permanent leakage current in the order of 0.5 to 1 mA per ballast. This therefore results in a limit being placed on the number of ballasts that can be supplied by a Residual Current Differential Safety Device (RCD).

At switch-on, the initial load of these capacitors can also cause the circulation of a current peak whose magnitude can reach several amps for 10 μ s. This current peak may cause unwanted tripping of unsuitable devices.

N33

© Schneider Electric - all rights reserved

High-frequency emissions

Electronic ballasts are responsible for high-frequency conducted and radiated emissions.

The very steep rising edges applied to the ballast output conductors cause current pulses circulating in the stray capacities to earth. As a result, stray currents circulate in the earth conductor and the power supply conductors. Due to the high frequency of these currents, there is also electromagnetic radiation. To limit these HF emissions, the lamp should be placed in the immediate proximity of the ballast, thus reducing the length of the most strongly radiating conductors.

The different power supply modes (see Fig. N48)

Technology	Power supply mode	Other device
Standard incandescent	Direct power supply	Dimmer switch
Halogen incandescent		
ELV halogen incandescent	Transformer	Electronic converter
Fluorescent tube	Magnetic ballast and starter	Electronic ballast
		Electronic dimmer + ballast
Compact fluorescent lamp	Built-in electronic ballast	
Mercury vapor	Magnetic ballast	Electronic ballast
High-pressure sodium		
Low-pressure sodium		
Metal halide		

Fig. N48 : Different power supply modes

4.3 Constraints related to lighting devices and recommendations

The current actually drawn by luminaires

The risk

This characteristic is the first one that should be defined when creating an installation, otherwise it is highly probable that overload protection devices will trip and users may often find themselves in the dark.

It is evident that their determination should take into account the consumption of all components, especially for fluorescent lighting installations, since the power consumed by the ballasts has to be added to that of the tubes and bulbs.

The solution

For incandescent lighting, it should be remembered that the line voltage can be more than 10% of its nominal value, which would then cause an increase in the current drawn.

For fluorescent lighting, unless otherwise specified, the power of the magnetic ballasts can be assessed at 25% of that of the bulbs. For electronic ballasts, this power is lower, in the order of 5 to 10%.

The thresholds for the overcurrent protection devices should therefore be calculated as a function of the total power and the power factor, calculated for each circuit.

Overcurrents at switch-on

The risk

The devices used for control and protection of lighting circuits are those such as relays, triac, remote-control switches, contactors or circuit-breakers.

The main constraint applied to these devices is the current peak on energization. This current peak depends on the technology of the lamps used, but also on the installation characteristics (supply transformer power, length of cables, number of lamps) and the moment of energization in the line voltage period. A high current peak, however fleeting, can cause the contacts on an electromechanical control device to weld together or the destruction of a solid state device with semi-conductors.

N34

4 Lighting circuits

Two solutions

Because of the inrush current, the majority of ordinary relays are incompatible with lighting device power supply. The following recommendations are therefore usually made:

- Limit the number of lamps to be connected to a single device so that their total power is less than the maximum permissible power for the device
- Check with the manufacturers what operating limits they suggest for the devices. This precaution is particularly important when replacing incandescent lamps with compact fluorescent lamps

By way of example, the table in **Figure N49** indicates the maximum number of compensated fluorescent tubes that can be controlled by different devices with 16 A rating. Note that the number of controlled tubes is well below the number corresponding to the maximum power for the devices.

Tube unit power requirement (W)	Number of tubes corresponding to the power 16 A x 230 V	Maximum number of tubes that can be controlled by		
		Contactors GC16 A CT16 A	Remote control switches TL16 A	Circuit-breakers C60-16 A
18	204	15	50	112
36	102	15	25	56
58	63	10	16	34

Fig. N49 : The number of controlled tubes is well below the number corresponding to the maximum power for the devices

But a technique exists to limit the current peak on energization of circuits with capacitive behavior (magnetic ballasts with parallel compensation and electronic ballasts). It consists of ensuring that activation occurs at the moment when the line voltage passes through zero. Only solid state switches with semi-conductors offer this possibility (see **Fig. N50a**). This technique has proved to be particularly useful when designing new lighting circuits.

More recently, hybrid technology devices have been developed that combine a solid state switch (activation on voltage passage through zero) and an electromechanical contactor short-circuiting the solid state switch (reduction of losses in the semi-conductors) (see **Fig. N50b**).

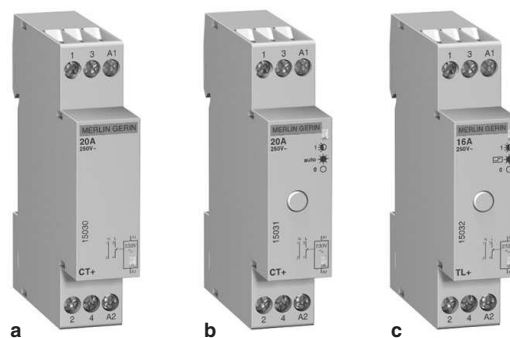


Fig. N50 : "Standard" CT+ contactor [a], CT+ contactor with manual override, pushbutton for selection of operating mode and indicator lamp showing the active operating mode [b], and TL + remote-control switch [c] (Merlin Gerin brand)

N35

Modular contactors and impulse relays do not use the same technologies. Their rating is determined according to different standards. For example, for a given rating, an impulse relay is more efficient than a modular contactor for the control of light fittings with a strong inrush current, or with a low power factor (non-compensated inductive circuit).

Choice of relay rating according to lamp type

- Figure 51 below shows the maximum number of light fittings for each relay, according to the type, power and configuration of a given lamp. As an indication, the total acceptable power is also mentioned.
 - These values are given for a 230 V circuit with 2 active conductors (single-phase phase/neutral or two-phase phase/phase). For 110 V circuits, divide the values in the table by 2.
 - To obtain the equivalent values for the whole of a 230 V three-phase circuit, multiply the number of lamps and the total acceptable power:
 - by $\sqrt{3}$ (1.73) for circuits without neutral;
 - by 3 for circuits with neutral.
- Note:** The power ratings of the lamps most commonly used are shown in bold.

Type of lamp	Unit power and capacitance of power factor correction capacitor	Maximum number of light fittings for a single-phase circuit and maximum power output per circuit													
		TL impulse relay				CT contactor									
		16 A	32 A	16 A	25 A	40 A	63 A	16 A	25 A	40 A	63 A	16 A	25 A	40 A	63 A
Basic incandescent lamps															
LV halogen lamps															
Replacement mercury vapour lamps (without ballast)															
	40 W	40	1500 W	106	4000 W	38	1550 W	57	2300 W	115	4600 W	172	6900 W		
	60 W	25	to	66	to	30	to	45	to	85	to	125	to		
	75 W	20	1600 W	53	4200 W	25	2000 W	38	2850 W	70	5250 W	100	7500 W		
	100 W	16		42		19		28		50		73			
	150 W	10		28		12		18		35		50			
	200 W	8		21		10		14		26		37			
	300 W	5	1500 W	13	4000 W	7	2100 W	10	3000 W	18	5500 W	25	7500 W		
	500 W	3		8		4		6		10		15			
	1000 W	1		4		2		3		6	6000 W	8	8000 W		
	1500 W	1		2		1		2		4		5			
ELV 12 or 24 V halogen lamps															
With ferromagnetic transformer	20 W	70	1350 W	180	3600 W	15	300 W	23	450 W	42	850 W	63	1250 W		
	50 W	28	to	74	to	10	to	15	to	27	to	42	to		
	75 W	19	1450 W	50	3750 W	8	600 W	12	900 W	23	1950 W	35	2850 W		
	100 W	14		37		6		8		18		27			
With electronic transformer	20 W	60	1200 W	160	3200 W	62	1250 W	90	1850 W	182	3650 W	275	5500 W		
	50 W	25	to	65	to	25	to	39	to	76	to	114	to		
	75 W	18	1400 W	44	3350 W	20	1600 W	28	2250 W	53	4200 W	78	6000 W		
	100 W	14		33		16		22		42		60			
Fluorescent tubes with starter and ferromagnetic ballast															
1 tube without compensation (1)	15 W	83	1250 W	213	3200 W	22	330 W	30	450 W	70	1050 W	100	1500 W		
	18 W	70	to	186	to	22	to	30	to	70	to	100	to		
	20 W	62	1300 W	160	3350 W	22	850 W	30	1200 W	70	2400 W	100	3850 W		
	36 W	35		93		20		28		60		90			
	40 W	31		81		20		28		60		90			
	58 W	21		55		13		17		35		56			
	65 W	20		50		13		17		35		56			
	80 W	16		41		10		15		30		48			
	115 W	11		29		7		10		20		32			
1 tube with parallel compensation (2)	15 W	5 µF	60	900 W	160	2400 W	15	200 W	20	300 W	40	600 W	60	900 W	
	18 W	5 µF	50		133		15	to	20	40	600 W	60	to		
	20 W	5 µF	45		120		15	800 W	20	1200 W	40	2400 W	60	3500 W	
	36 W	5 µF	25		66		15		20	40		60			
	40 W	5 µF	22		60		15		20	40		60			
	58 W	7 µF	16		42		10		15	30		43			
	65 W	7 µF	13		37		10		15	30		43			
	80 W	7 µF	11		30		10		15	30		43			
	115 W	16 µF	7		20		5		7	14		20			
2 or 4 tubes with series compensation	2 x 18 W	56	2000 W	148	5300 W	30	1100 W	46	1650 W	80	2900 W	123	4450 W		
	4 x 18 W	28		74		16	to	24	to	44	to	68	to		
	2 x 36 W	28		74		16	1500 W	24	2400 W	44	3800 W	68	5900 W		
	2 x 58 W	17		45		10		16		27		42			
	2 x 65 W	15		40		10		16		27		42			
	2 x 80 W	12		33		9		13		22		34			
	2 x 115 W	8		23		6		10		16		25			
Fluorescent tubes with electronic ballast															
1 or 2 tubes	18 W	80	1450 W	212	3800 W	74	1300 W	111	2000 W	222	4000 W	333	6000 W		
	36 W	40	to	106	to	38	to	58	to	117	to	176	to		
	58 W	26	1550 W	69	4000 W	25	1400 W	37	2200 W	74	4400 W	111	6600 W		
	2 x 18 W	40		106		36		55		111		166			
	2 x 36 W	20		53		20		30		60		90			
	2 x 58 W	13		34		12		19		38		57			

Fig. N51 : Maximum number of light fittings for each relay, according to the type, power and configuration of a given lamp (Continued on opposite page)

4 Lighting circuits

Type of lamp	Unit power and capacitance of power factor correction capacitor		Maximum number of light fittings for a single-phase circuit and maximum power output per circuit											
			TL impulse relay				CT contactor							
			16 A		32 A		16 A		25 A		40 A		63 A	
Compact fluorescent lamps														
With external electronic ballast	5 W		240	1200 W	630	3150 W	210	1050 W	330	1650 W	670	3350 W	not tested	
	7 W		171	to	457	to	150	to	222	to	478	to	4000 W	
	9 W		138	1450 W	366	3800 W	122	1300 W	194	2000 W	383			
	11 W		118		318		104		163		327			
	18 W		77		202		66		105		216			
	26 W		55		146		50		76		153			
With integral electronic ballast (replacement for incandescent lamps)	5 W		170	850 W	390	1950 W	160	800 W	230	1150 W	470	2350 W	710	3550 W
	7 W		121	to	285	to	114	to	164	to	335	to	514	to
	9 W		100	1050 W	233	2400 W	94	900 W	133	1300 W	266	2600 W	411	3950 W
	11 W		86		200		78		109		222		340	
	18 W		55		127		48		69		138		213	
	26 W		40		92		34		50		100		151	
High-pressure mercury vapour lamps with ferromagnetic ballast without ignitor														
Replacement high-pressure sodium vapour lamps with ferromagnetic ballast with integral ignitor (3)														
Without compensation (1)	50 W		not tested, infrequent use				15	750 W	20	1000 W	34	1700 W	53	2650 W
	80 W						10	to	15	to	27	to	40	to
	125 / 110 W (3)						8	1000 W	10	1600 W	20	2800 W	28	4200 W
	250 / 220 W (3)						4		6		10		15	
	400 / 350 W (3)						2		4		6		10	
	700 W						1		2		4		6	
With parallel compensation (2)	50 W	7 µF					10	500 W	15	750 W	28	1400 W	43	2150 W
	80 W	8 µF					9	to	13	to	25	to	38	to
	125 / 110 W (3)	10 µF					9	1400 W	10	1600 W	20	3500 W	30	5000 W
	250 / 220 W (3)	18 µF					4		6		11		17	
	400 / 350 W (3)	25 µF					3		4		8		12	
	700 W	40 µF					2		2		5		7	
	1000 W	60 µF					0		1		3		5	
Low-pressure sodium vapour lamps with ferromagnetic ballast with external ignitor														
Without compensation (1)	35 W		not tested, infrequent use				5	270 W	9	320 W	14	500 W	24	850 W
	55 W						5	to	9	to	14	to	24	to
	90 W						3	360 W	6	720 W	9	1100 W	19	1800 W
	135 W						2		4		6		10	
	180 W						2		4		6		10	
With parallel compensation (2)	35 W	20 µF	38	1350 W	102	3600 W	3	100 W	5	175 W	10	350 W	15	550 W
	55 W	20 µF	24		63		3	to	5	to	10	to	15	to
	90 W	26 µF	15		40		2	180 W	4	360 W	8	720 W	11	1100 W
	135 W	40 µF	10		26		1		2		5		7	
	180 W	45 µF	7		18		1		2		4		6	
High-pressure sodium vapour lamps														
Metal-iodide lamps														
With ferromagnetic ballast with external ignitor, without compensation (1)	35 W		not tested, infrequent use				16	600 W	24	850 W	42	1450 W	64	2250 W
	70 W						8		12	to	20	to	32	to
	150 W						4		7	1200 W	13	2000 W	18	3200 W
	250 W						2		4		8		11	
	400 W						1		3		5		8	
	1000 W						0		1		2		3	
With ferromagnetic ballast with external ignitor and parallel compensation (2)	35 W	6 µF	34	1200 W	88	3100 W	12	450 W	18	650 W	31	1100 W	50	1750 W
	70 W	12 µF	17	to	45	to	6	to	9	to	16	to	25	to
	150 W	20 µF	8	1350 W	22	3400 W	4	1000 W	6	2000 W	10	4000 W	15	6000 W
	250 W	32 µF	5		13		3		4		7		10	
	400 W	45 µF	3		8		2		3		5		7	
	1000 W	60 µF	1		3		1		2		3		5	
	2000 W	85 µF	0		1		0		1		2		3	
With electronic ballast	35 W		38	1350 W	87	3100 W	24	850 W	38	1350 W	68	2400 W	102	3600 W
	70 W		29	to	77	to	18	to	29	to	51	to	76	to
	150 W		14	2200 W	33	5000 W	9	1350 W	14	2200 W	26	4000 W	40	6000 W

- (1) Circuits with non-compensated ferromagnetic ballasts consume twice as much current for a given lamp power output. This explains the small number of lamps in this configuration.
- (2) The total capacitance of the power factor correction capacitors in parallel in a circuit limits the number of lamps that can be controlled by a contactor. The total downstream capacitance of a modular contactor of rating 16, 25, 40 or 63 A should not exceed 75, 100, 200 or 300 µF respectively. Allow for these limits to calculate the maximum acceptable number of lamps if the capacitance values are different from those in the table.
- (3) High-pressure mercury vapour lamps without ignitor, of power 125, 250 and 400 W, are gradually being replaced by high-pressure sodium vapour lamps with integral ignitor, and respective power of 110, 220 and 350 W.

Fig. N51 : Maximum number of light fittings for each relay, according to the type, power and configuration of a given lamp (Concluded)

N37

N - Characteristics of particular sources and loads

Protection of lamp circuits: Maximum number of lamps and MCB rating versus lamp type, unit power and MCB tripping curve

During start up of discharge lamps (with their ballast), the inrush current drawn by each lamp may be in the order of:

- 25 x circuit start current for the first 3 ms
- 7 x circuit start current for the following 2 s

For fluorescent lamps with High Frequency Electronic control ballast, the protective device ratings must cope with 25 x inrush for 250 to 350 μ s.

However due to the circuit resistance the total inrush current seen by the MCB is lower than the summation of all individual lamp inrush current if directly connected to the MCB.

The tables below (see **Fig. N52 to NXX**) take into account:

- Circuits cables have a length of 20 meters from distribution board to the first lamp and 7 meters between each additional fittings.
- MCB rating is given to protect the lamp circuit in accordance with the cable cross section, and without unwanted tripping upon lamp starting.
- MCB tripping curve (C = instantaneous trip setting 5 to 10 In, D = instantaneous trip setting 10 to 14 In).

Lamp power (W)	Number of lamps per circuit																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	MCB rating C & D tripping curve																			
14/18	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
14 x2	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
14 x3	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10
14 x4	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10
18 x2	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
18 x4	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
21/24	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
21/24 x2	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
28	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
28 x2	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10
35/36/39	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
35/36 x2	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10
38/39 x2	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10
40/42	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
40/42 x2	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16
49/50	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
49/50 x2	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	16	16	16
54/55	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10
54/55 x2	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16	16	16
60	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10

N38

Fig. N52 : Fluorescent tubes with electronic ballast - Vac = 230 V

Lamp power (W)	Number of lamps per circuit																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	MCB rating C & D tripping curve																			
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
9	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
11	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
13	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
14	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
15	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
16	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
17	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
18	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
20	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
21	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
23	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
25	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10

Fig. N53 : Compact fluorescent lamps - Vac = 230 V

4 Lighting circuits

Lamp power (W)	Number of lamps per circuit																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
MCB rating C tripping curve																				
50	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
80	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	10	10
125	6	6	6	10	10	10	10	10	10	10	10	16	16	16	16	16	16	16	20	20
250	6	10	10	16	16	16	16	16	16	20	20	25	25	25	32	32	32	32	40	40
400	6	16	20	25	25	32	32	32	32	32	40	40	40	40	50	50	50	50	63	63
1000	16	32	40	50	50	50	50	63	63	-	-	-	-	-	-	-	-	-	-	-
MCB rating D tripping curve																				
50	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10
80	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16
125	6	6	6	6	6	6	10	10	10	10	10	16	16	16	16	16	16	16	20	20
250	6	6	10	10	10	10	16	16	16	20	20	25	25	25	32	32	32	32	40	40
400	6	10	16	16	20	20	25	25	25	32	32	40	40	40	50	50	50	50	63	63
1000	10	20	25	32	40	40	50	63	63	-	-	-	-	-	-	-	-	-	-	-

Fig. N54 : High pressure mercury vapour (with ferromagnetic ballast and PF correction) - Vac = 230 V

Lamp power (W)	Number of lamps per circuit																			
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
MCB rating C tripping curve																				
Ferromagnetic ballast																				
18	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
26	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
35/36	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
55	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
91	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16	16
131	6	6	6	10	10	10	10	10	10	10	10	10	16	16	16	16	16	16	16	20
135	6	6	6	10	10	10	10	10	10	10	10	16	16	16	16	16	16	20	20	20
180	6	6	10	10	10	10	10	10	10	16	16	16	16	20	20	20	25	25	25	25
Electronic ballast																				
36	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
55	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
66	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10
91	6	6	6	6	6	10	10	10	10	10	10	10	10	10	10	10	16	16	16	16
MCB rating D tripping curve																				
Ferromagnetic ballast																				
18	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
26	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
35/36	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
55	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10
91	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16
131	6	6	6	6	6	6	6	10	10	10	10	10	16	16	16	16	16	16	16	20
135	6	6	6	6	6	6	10	10	10	10	10	16	16	16	16	16	16	20	20	20
180	6	6	6	6	10	10	10	10	10	16	16	16	16	20	20	20	25	25	25	25
Electronic ballast																				
36	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
55	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
66	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10
91	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	16	16	16	16

Fig. N55 : Low pressure sodium (with PF correction) - Vac = 230 V

N39

N - Characteristics of particular sources and loads

Lamp power (W)	Number of lamps per circuit								MCB rating C tripping curve											
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Ferromagnetic ballast																				
50	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10
70	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16
100	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16	16
150	6	6	10	10	10	10	10	10	6	16	16	16	16	16	16	20	20	20	25	25
250	6	10	16	16	16	20	20	20	20	20	20	25	25	25	32	32	32	32	40	40
400	10	16	20	25	32	32	32	32	32	32	32	40	40	40	50	50	50	50	63	63
1000	16	32	40	50	50	50	50	63	63	-	-	-	-	-	-	-	-	-	-	-
Electronic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
50	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
100	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16	16
MCB rating D tripping curve																				
Ferromagnetic ballast																				
50	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10
70	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16
100	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16	16
150	6	6	6	6	6	10	10	10	10	16	16	16	16	16	16	20	20	20	25	25
250	6	6	10	10	16	16	16	16	16	16	20	20	25	25	25	32	32	32	32	40
400	6	10	16	16	20	20	25	25	25	32	32	40	40	40	50	50	50	50	63	63
1000	10	20	32	32	40	40	50	63	63	-	-	-	-	-	-	-	-	-	-	-
Electronic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
50	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
100	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	16	16	16	16	16

Fig. N56 : High pressure sodium (with PF correction) - Vac = 230 V

Lamp power (W)	Number of lamps per circuit								MCB rating C tripping curve											
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
Ferromagnetic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
70	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	10	16	16
150	6	6	10	10	10	10	10	10	10	16	16	16	16	16	16	20	20	20	25	25
250	6	10	16	16	16	20	20	20	20	20	20	25	25	25	32	32	32	32	40	40
400	6	16	20	25	25	32	32	32	32	32	32	40	40	40	50	50	50	50	63	63
1000	16	32	40	50	50	50	50	63	63	63	63	63	63	63	63	63	63	63	63	63
1800/2000	25	50	63	63	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electronic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
70	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
150	6	6	6	10	10	10	10	10	10	10	16	16	16	16	16	16	16	16	20	20
MCB rating D tripping curve																				
Ferromagnetic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
70	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10	16	16
150	6	6	6	6	6	10	10	10	10	10	16	16	16	16	16	20	20	20	25	25
250	6	6	10	10	16	16	16	16	16	16	20	20	25	25	25	32	32	32	32	40
400	6	10	16	16	20	20	25	25	25	32	32	40	40	40	50	50	50	50	63	63
1000	16	20	32	32	40	50	50	63	63	-	-	-	-	-	-	-	-	-	-	-
1800	16	32	40	50	63	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2000	20	32	40	50	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Electronic ballast																				
35	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6
70	6	6	6	6	6	6	6	6	6	6	6	6	6	10	10	10	10	10	10	10
150	6	6	6	6	6	6	6	6	6	10	10	16	16	16	16	16	16	16	20	20

Fig. N57 : Metal halide (with PF correction) - Vac = 230 V

Lamp power (W)	Number of lamps per circuit								MCB rating C tripping curve											
	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
MCB rating C tripping curve																				
1800	16	32	40	50	50	50	50	63	63	-	-	-	-	-	-	-	-	-	-	-
2000	16	32	40	50	50	50	50	63	63	-	-	-	-	-	-	-	-	-	-	-
MCB rating D tripping curve																				
1800	16	20	32	32	32	32	50	63	63	-	-	-	-	-	-	-	-	-	-	-
2000	16	25	32	32	32	32	50	63	63	-	-	-	-	-	-	-	-	-	-	-

Fig. N58 : Metal halide (with ferromagnetic ballast and PF correction) - Vac = 400 V

4 Lighting circuits

Overload of the neutral conductor

The risk

In an installation including, for example, numerous fluorescent tubes with electronic ballasts supplied between phases and neutral, a high percentage of 3rd harmonic current can cause an overload of the neutral conductor. **Figure N59** below gives an overview of typical H3 level created by lighting.

Lamp type	Typical power	Setting mode	Typical H3 level
Incandescent lamp with dimmer	100 W	Light dimmer	5 to 45 %
ELV halogen lamp	25 W	Electronic ELV transformer	5 %
Fluorescent tube	100 W	Magnetic ballast	10 %
	< 25 W	Electronic ballast	85 %
	> 25 W	+ PFC	30 %
Discharge lamp	100 W	Magnetic ballast	10 %
		Electrical ballast	30 %

Fig. N59 : Overview of typical H3 level created by lighting

The solution

Firstly, the use of a neutral conductor with a small cross-section (half) should be prohibited, as requested by Installation standard IEC 60364, section 523–5–3.

As far as overcurrent protection devices are concerned, it is necessary to provide 4-pole circuit-breakers with protected neutral (except with the TN-C system for which the PEN, a combined neutral and protection conductor, should not be cut).

This type of device can also be used for the breaking of all poles necessary to supply luminaires at the phase-to-phase voltage in the event of a fault.

A breaking device should therefore interrupt the phase and Neutral circuit simultaneously.

Leakage currents to earth

The risk

At switch-on, the earth capacitances of the electronic ballasts are responsible for residual current peaks that are likely to cause unintentional tripping of protection devices.

Two solutions

The use of Residual Current Devices providing immunity against this type of impulse current is recommended, even essential, when equipping an existing installation (see **Fig. N60**).

For a new installation, it is sensible to provide solid state or hybrid control devices (contactors and remote-control switches) that reduce these impulse currents (activation on voltage passage through zero).

Overvoltages

The risk

As illustrated in earlier sections, switching on a lighting circuit causes a transient state which is manifested by a significant overcurrent. This overcurrent is accompanied by a strong voltage fluctuation applied to the load terminals connected to the same circuit. These voltage fluctuations can be detrimental to correct operation of sensitive loads (micro-computers, temperature controllers, etc.)

The Solution

It is advisable to separate the power supply for these sensitive loads from the lighting circuit power supply.

Sensitivity of lighting devices to line voltage disturbances

Short interruptions

■ The risk

Discharge lamps require a relighting time of a few minutes after their power supply has been switched off.

■ The solution

Partial lighting with instantaneous relighting (incandescent lamps or fluorescent tubes, or "hot restrike" discharge lamps) should be provided if safety requirements so dictate. Its power supply circuit is, depending on current regulations, usually distinct from the main lighting circuit.

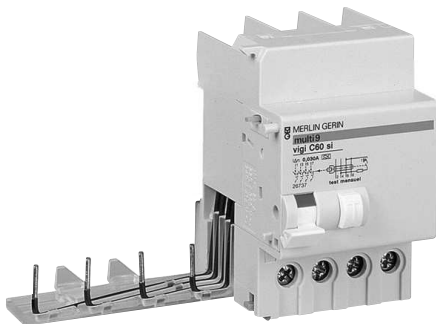


Fig. N60 : s.i. residual current devices with immunity against impulse currents (Merlin Gerin brand)

N41

© Schneider Electric - all rights reserved

Voltage fluctuations

■ The risk

The majority of lighting devices (with the exception of lamps supplied by electronic ballasts) are sensitive to rapid fluctuations in the supply voltage. These fluctuations cause a flicker phenomenon which is unpleasant for users and may even cause significant problems. These problems depend on both the frequency of variations and their magnitude.

Standard IEC 61000-2-2 (“compatibility levels for low-frequency conducted disturbances”) specifies the maximum permissible magnitude of voltage variations as a function of the number of variations per second or per minute.

These voltage fluctuations are caused mainly by high-power fluctuating loads (arc furnaces, welding machines, starting motors).

■ The solution

Special methods can be used to reduce voltage fluctuations. Nonetheless, it is advisable, wherever possible, to supply lighting circuits via a separate line supply. The use of electronic ballasts is recommended for demanding applications (hospitals, clean rooms, inspection rooms, computer rooms, etc).

Developments in control and protection equipment

The use of light dimmers is more and more common. The constraints on ignition are therefore reduced and derating of control and protection equipment is less important. New protection devices adapted to the constraints on lighting circuits are being introduced, for example Merlin Gerin brand circuit-breakers and modular residual current circuit-breakers with special immunity, such as s.i. type ID switches and Vigi circuit-breakers. As control and protection equipment evolves, some now offer remote control, 24-hour management, lighting control, reduced consumption, etc.

4.4 Lighting of public areas

Normal lighting

Regulations governing the minimum requirements for buildings receiving the public in most European countries are as follows:

- Installations which illuminates areas accessible to the public must be controlled and protected independently from installations providing illumination to other areas
- Loss of supply on a final lighting circuit (i.e. fuse blown or CB tripped) must not result in total loss of illumination in an area which is capable of accommodating more than 50 persons
- Protection by Residual Current Devices (RCD) must be divided amongst several devices (i.e. more than on device must be used)

Emergency lighting and other systems

When we refer to emergency lighting, we mean the auxiliary lighting that is triggered when the standard lighting fails.

Emergency lighting is subdivided as follows (EN-1838):

Safety lighting

It originates from the emergency lighting and is intended to provide lighting for people to evacuate an area safely or for those who try to finish a potentially dangerous operation before leaving the area. It is intended to illuminate the means of evacuation and ensure continuous visibility and ready usage in safety when standard or emergency lighting is needed. Safety lighting may be further subdivided as follows:

Safety lighting for escape routes

It originates from the safety lighting, and is intended to ensure that the escape means can be clearly identified and used safely when the area is busy.

Anti-panic lighting in extended areas

It originates from the safety lighting, and is intended to avoid panic and to provide the necessary lighting to allow people to reach a possible escape route area.

Emergency lighting and safety signs for escape routes

The emergency lighting and safety signs for escape routes are very important for all those who design emergency systems. Their suitable choice helps improve safety levels and allows emergency situations to be handled better.

N42

4 Lighting circuits

Standard EN 1838 ("Lighting applications. Emergency lighting") gives some fundamental concepts concerning what is meant by emergency lighting for escape routes:

"The intention behind lighting escape routes is to allow safe exit by the occupants, providing them with sufficient visibility and directions on the escape route ..."

The concept referred to above is very simple:

The safety signs and escape route lighting must be two separate things.

Functions and operation of the luminaires

The manufacturing specifications are covered by standard EN 60598-2-22, "Particular Requirements - Luminaires for Emergency Lighting", which must be read with EN 60598-1, "Luminaires – Part 1: General Requirements and Tests".

Duration

A basic requirement is to determine the duration required for the emergency lighting. Generally it is 1 hour but some countries may have different duration requirements according to statutory technical standards.

Operation

We should clarify the different types of emergency luminaires:

■ Non-maintained luminaires

- The lamp will only switch on if there is a fault in the standard lighting
- The lamp will be powered by the battery during failure
- The battery will be automatically recharged when the mains power supply is restored

■ Maintained luminaires

- The lamp can be switched on in continuous mode
- A power supply unit is required with the mains, especially for powering the lamp, which can be disconnected when the area is not busy
- The lamp will be powered by the battery during failure.

Design

The integration of emergency lighting with standard lighting must comply strictly with electrical system standards in the design of a building or particular place.

All regulations and laws must be complied with in order to design a system which is up to standard (see **Fig. N61**).

The main functions of an emergency lighting system when standard lighting fails are the following:

- Provide sufficient emergency lighting along the escape paths so that people can safely find their ways to the exits.

- Clearly show the escape route using clear signs.

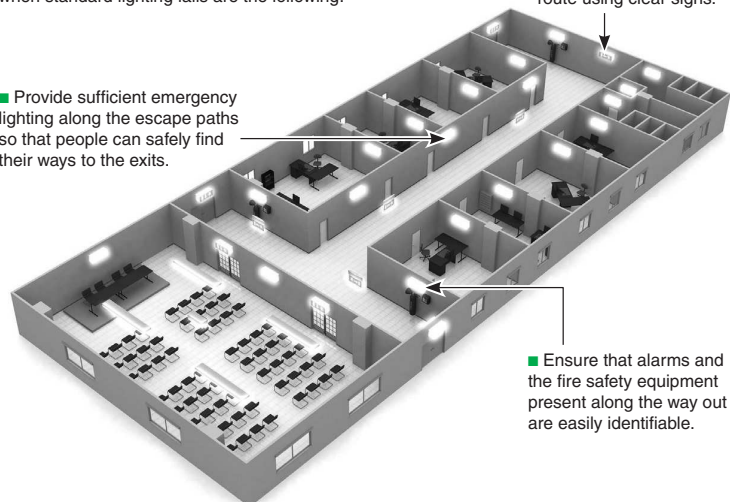


Fig. N61 : The main functions of an emergency lighting system

European standards

The design of emergency lighting systems is regulated by a number of legislative provisions that are updated and implemented from time to time by new documentation published on request by the authorities that deal with European and international technical standards and regulations.

Each country has its own laws and regulations, in addition to technical standards

which govern different sectors. Basically they describe the places that must be provided with emergency lighting as well as its technical specifications. The designer's job is to ensure that the design project complies with these standards.

EN 1838

A very important document on a European level regarding emergency lighting is the Standard EN 1838, "Lighting applications. Emergency lighting".

This standard presents specific requirements and constraints regarding the operation and the function of emergency lighting systems.

CEN and CENELEC standards

With the CEN (Comité Européen de Normalisation) and CENELEC standards (Comité Européen de Normalisation Electrotechnique), we are in a standardised environment of particular interest to the technician and the designer. A number of sections deal with emergencies. An initial distinction should be made between luminaire standards and installation standards.

EN 60598-2-22 and EN-60598-1

Emergency lighting luminaires are subject to European standard EN 60598-2-22, "Particular Requirements - Luminaires for Emergency Lighting", which is an integrative text (of specifications and analysis) of the Standard EN-60598-1, Luminaires – "Part 1: General Requirements and Tests".